Mulching Heads

IMH Series



INDECO
ATTACHMENT SOLUTIONS
a wipro hydraulics company



Mulching Heads
IMH


Indeco's IMH series of hydraulically-driven, boom-mounted mulching heads has been designed to turn excavators and miniloaders into powerful land-clearing tools, facilitating the felling and clearing of vegetation, greatly reducing costs and time. Available for a wide range of machines from 3 to 49 ton, the IMH mulchers are made with HARDOX® components that ensure excellent durability and efficiency. Powerful and easy to handle, they let you work quickly and precisely, guaranteeing the best results with the minimum use of personnel in the most diverse applications. IMH mulchers are perfect tools for the cleaning and periodic maintenance of areas invaded by spontaneous vegetation such as pipelines, railway lines, ski slopes, electricity pylons, roadways and motorways, residential and commercial green areas. Very useful in all operations for the maintenance of green areas, elimination of undergrowth, creation and maintenance of paths and firebreaks, clearing of trees, vegetation, and branches, the IMH mulchers are also ideal tools in special applications that require natural landscape reshaping such as the creation and maintenance of golf courses, hedgerow rejuvenation, and the removal of stumps, roots, and wood residues of various kinds. In addition to carrying out their work quickly and effectively, an aid to protect and naturally fertilize the soils, reintroducing unwanted vegetation into the ecosystem in the form of mulch. This way, the soil is protected from wind and rain erosion and at the same time nourished with fertilising microorganisms.






Characteristics of Indeco's Mulching Heads

The multiple V-belt drive **|1|** guarantees maximum reliability, power and ease of maintenance. Direct drive models are also available.
The hydraulic motor **|2|** can have fixed or variable displacement depending on the models. The high performance FD fixed displacement motor (gear on some models, piston on others) has special high pressure resistant seals and is capable of accepting back pressures. The VD variable displacement piston motor, only currently in use on some versions, adapts more to the various hydraulic specifications of the machines, minimises overheating by improving pick-up, optimises torque and rotor speed and maximises productivity.
The particular design of the teeth, of different types, their number and position on the teeth holder **|3|** have been designed to offer the best possible grinding of the material, increasing the productivity and stability of the tool. In addition, special **|4|** "bite limiter" wear-resistant steel profiles, welded on the drum in correspondence of the teeth, make it possible to make the cutting depth more efficient and the rotation speed more constant, ensuring greater continuity in work and better performance.
The body and components in HARDOX® **|5|** ensure maximum sturdiness and long service life, even when used in particularly heavy-duty applications.
The Heavy Duty rotor **|6|** ensures prolonged efficiency over time, in any type of application.
The runners in HARDOX® **|7|** offer effective protection for those parts subject to wear.
Direct access to the monobloc shaft **|8|** helps to keep the mulching head perfectly efficient, facilitating maintenance operations on the bearings and components of the shaft itself.
The pressure and flow limiting valve **|9|** allows safe and fast installation, preventing incorrect set-ups from compromising productivity and the life of the mulching head. The safety and anti-cavitation valve protects the motor from possible incorrect connection of the pipes and therefore from unexpected flow reversals, extending the life of the seals.
The centralised hydraulic connections, the drainage line and the greasing points **|10|** are visible to the operator during use thereby allowing constant checking of correct functioning of the tool.
The interchangeable assembly points **|11|** allow maximum flexibility of use with any excavator.
Direct access to the motor and hydraulic connections **|12|** facilitates maintenance interventions.

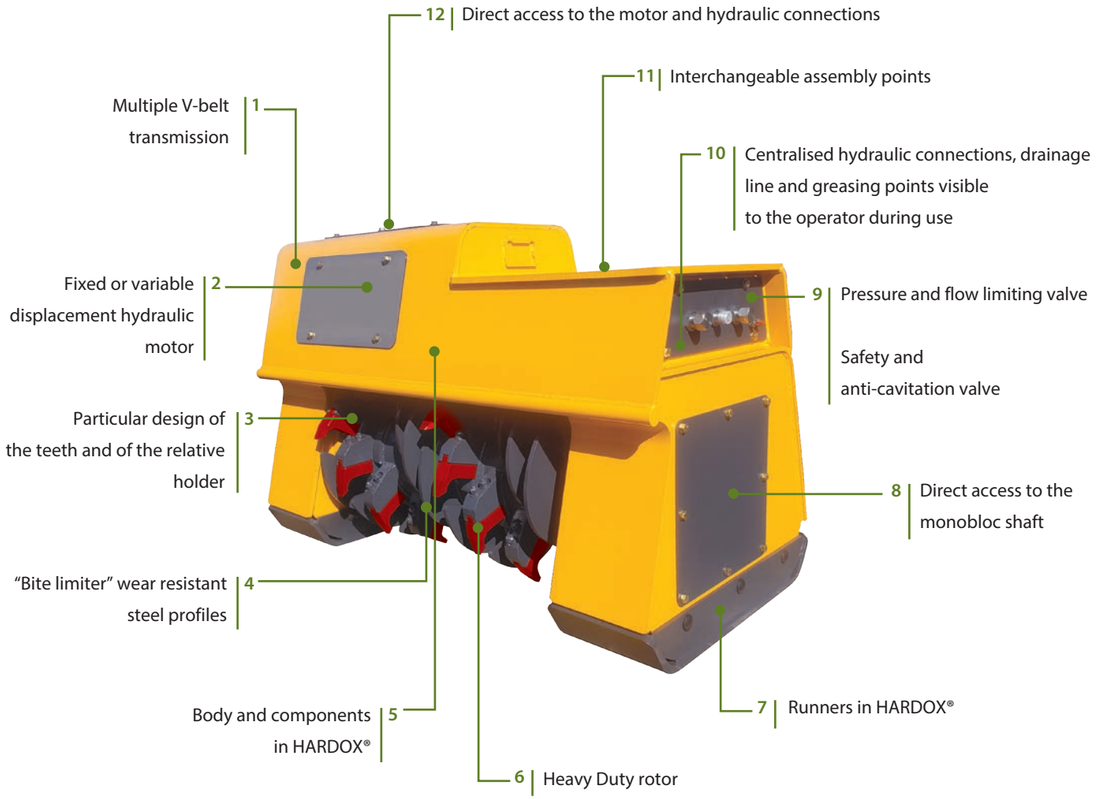

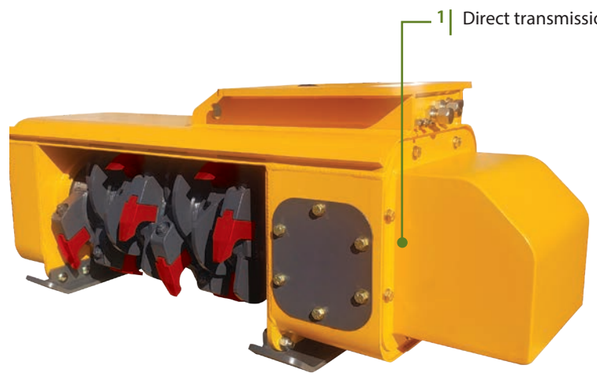

IMH
for compact excavators



Technical Data	IMH 3	IMH 4	IMH 5	IMH 6
Type of carrier	1 3 4	1 3 4	1 3 4	1 3 4
Cutting width	24 in	24 in	30 in	30 in
Oil delivery*	12 ÷ 16 gpm	17 ÷ 24 gpm	17 ÷ 24 gpm	24 ÷ 30 gpm
Optimal oil supply*	15 gpm	20 gpm	20 gpm	26 gpm
Number of teeth	12	12	16	16
Drum diameter	8 in	8 in	8 in	8 in
Fixed FD / variable VD displacement motor specifications	Gears FD	Gears FD	Gears FD	Gears FD
Transmission	Direct	Direct	Direct	Direct
Working pressure	2500 ÷ 3500 psi	2500 ÷ 3500 psi	2500 ÷ 3500 psi	2500 ÷ 3500 psi
Attachment operating weight**	850 lbs	850 lbs	1180 lbs	1220 lbs
Mounting bracket compatibility	HP 550	HP 550	HP 1250	HP 1250

*The oil flow rate is measured by means of a flowmeter, in free flow conditions and in the absence of pressure.
**The attachment operating weight includes mounting bracket compatible with Indeco construction standards. Any differences in weight may be due to a different mounting bracket configuration.



Technical Data	IMH 8	IMH 10	IMH 14
Type of carrier	1 3 4	1 3 4	1 3 4
Cutting width	30 in	38 in	44 in
Oil delivery*	24 ÷ 32 gpm	24 ÷ 32 gpm	30 ÷ 40 gpm
Optimal oil supply*	28 gpm	28 gpm	36 gpm
Number of teeth	16	20	22
Drum diameter	8 in	8 in	8 in
Fixed FD / variable VD displacement motor specifications	Piston FD	Piston FD	Piston FD
Transmission	Direct	Direct	Direct
Working pressure	3500 ÷ 5000 psi	3500 ÷ 5000 psi	3500 ÷ 5000 psi
Attachment operating weight**	1280 lbs	1620 lbs	2310 lbs
Mounting bracket compatibility	HP 1250	HP 1250	HP 1500

The information in this catalog is subject to change without notice and without any obligation or responsibility on our part. The content of this catalog is provided as a courtesy to readers and constitutes non binding information only.


Carrier key



Compact excavator | Miniloader | Backhoe loader | Wheeled excavator | Tracked excavator

Compatibility

Suggested uses on machines with an overall weight (in ton):



IMH
for excavators



Technical Data	IMH 20	IMH 30
Type of carrier	4 5	4 5
Cutting width	42 in	50 in
Oil delivery*	45 ÷ 65 gpm	55 ÷ 80 gpm
Optimal oil supply*	55 gpm	65 gpm
Number of teeth	22	18
Drum diameter	12 in	12 in
Fixed FD / variable VD displacement motor specifications	Piston VD	Piston VD
Transmission	Belt	Belt
Working pressure	3500 ÷ 5000 psi	3500 ÷ 5000 psi
Attachment operating weight**	3300 lbs	4250 lbs
Mounting bracket compatibility	HP 3000 - HP 4000	HP 5000 ÷ HP 7500

*The oil flow rate is measured by means of a flowmeter, in free flow conditions and in the absence of pressure.
**The attachment operating weight includes mounting bracket compatible with Indeco construction standards. Any differences in weight may be due to a different mounting bracket configuration.

Carrier key



Compact excavator | Miniloader | Backhoe loader | Wheeled excavator | Tracked excavator

IMH
for Skid Steers



Technical Data	IMH 3.2 SS	IMH 4.2 SS	IMH 5.2 SS
Type of carrier	2	2	2
Cutting width	50 in	60 in	72 in
Oil delivery*	28 ÷ 40 gpm	28 ÷ 40 gpm	30 ÷ 50 gpm
Optimal oil supply*	30 gpm	40 gpm	40 gpm
Number of teeth	24	30	24
Drum diameter	8 in	8 in	8 in
Fixed FD / variable VD displacement motor specifications	Piston VD	Piston VD	Piston VD
Transmission	Belt	Belt	Belt
Working pressure	3500 ÷ 5000 psi	3500 ÷ 5000 psi	3500 ÷ 5000 psi
Attachment operating weight**	2190 lbs	3090 lbs	3120 lbs

The information in this catalog is subject to change without notice and without any obligation or responsibility on our part. The content of this catalog is provided as a courtesy to readers and constitutes non binding information only.

Compatibility

IMH 20
20 — 36

IMH 30
29 — 49

Suggested uses on machines with an overall weight (in ton):

IMH 3.2 SS
3.2 — 6

IMH 4.2 SS
4.2 — 6

IMH 5.2 SS
4.2 — 6

Appetite guide

The Indeco IMH hydraulic mulching heads allow the quick and lasting removal of unwanted vegetation of all types, including bushes, shrubs, trunks, roots and tree stumps after cutting. The data below refer to the maximum mulching diameter for each model under normal conditions. The data may vary in relation to factors such as the hardness of the wood, the type and state of the cutters on the machine cylinder, the characteristics of the excavator and the competence of the operator. Correct maintenance is also essential for optimal performance of the mulching head.

IMH for compact excavators	IMH 3	IMH 4	IMH 5	IMH 6
Maximum mulching diameter	3 - 4 in	4 - 6 in	4 - 6 in	4 - 6 in

	IMH 8	IMH 10	IMH 14
Maximum mulching diameter	5 - 7 in	5 - 7 in	8 - 12 in

IMH for excavators	IMH 20	IMH 30
Maximum mulching diameter	12 - 15 in	12 - 16 in

IMH for Skid Steers	IMH 3.2 SS	IMH 4.2 SS	IMH 5.2 SS
Maximum mulching diameter	7 - 9 in	8 - 10 in	8 - 10 in


Accessories

Indeconnect system

New remote monitoring system, based on the principles of the Internet of Things, to prevent equipment obsolescence and keep high performance. The **'Indeconnect'** system consists of a **device** equipped with 4G technology for a wireless connection to the network, to be mounted on the equipment, and a cloud-based **web platform** you can access from mobile devices (with an app) or from PC, that lets you view the data transmitted in real time by each installed device: working hours, working position in space, hydraulic oil temperature, ambient temperature, GPS position, and more.

Through Indeconnect you can:

- **Monitor productivity**, making sure each Indeco tool is working as intended
- **Check operations**, verifying in real time the various internal and external parameters of the equipment to make sure that it is used in optimal conditions and correctly
- **Increase security**, by remotely checking the position of the equipment through GPS
- **Plan maintenance**, monitoring the health of each Indeco tool in real time, also through the automatic alert and messaging system that lets you order spare parts and reduce machine downtime to a minimum
- **Optimise rental**, by supervising and monitoring the management of rented equipment.

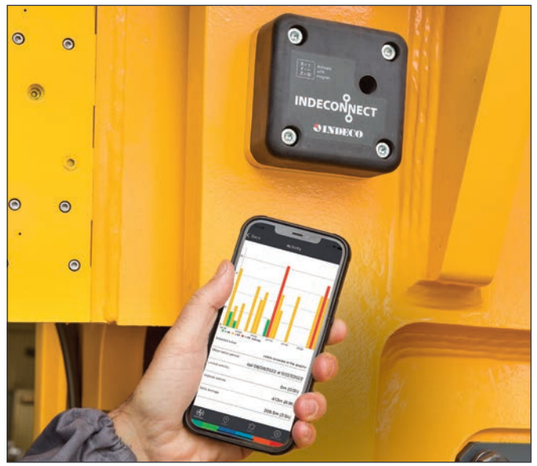


The cutters

1 | Multi-purpose cutter
A heavy duty tool recommended for all types of mulching applications. It is highly productive for the mulching of shrubs, small-diameter tree trunks, bushes and branches. The operator is ensured an excellent combination of productivity and longevity of the high-performance cutter.


2 | Cobra cutter
A forest mulching tool for extremely heavy duty use, recommended for work in more demanding applications in the case of the prevalent presence of harder long-fibre woods, stumps external to the ground and larger diameter tree trunks. The initial surface of the smaller cutter facilitates deeper penetration, while the various lateral profiles of the tool facilitate yielding of the wood fibres and contribute to preventing possible slowing in mulching thicker logs.

3 | Cutter with Tungsten Carbide
Tool with apical insert in Tungsten Carbide for use in special applications, where there is a greater presence of buried stumps, uneven ground, sand, debris or other hard and abrasive materials that could cause the premature wear of traditional steel tools. The Tungsten Carbide cutter is also recommended in applications where a finer mulch is required.


1 |

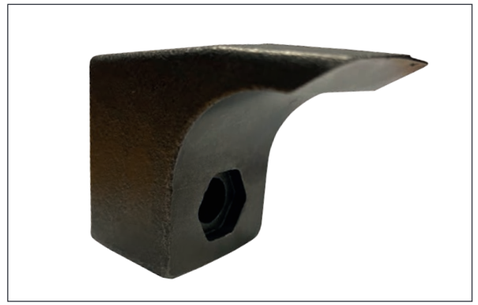

2 |

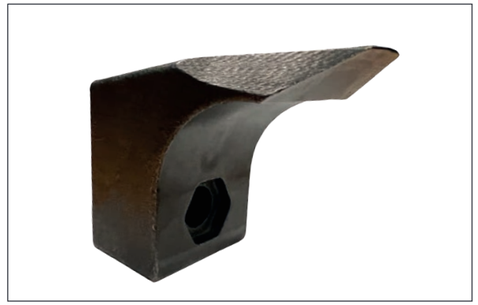

3 |

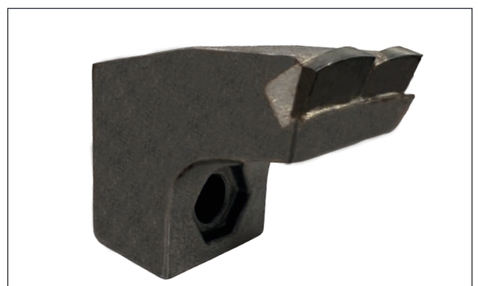



Application areas

Land Clearing

Agriculture and Forestry

		IMH
Land clearing	• Right of way clearance and maintenance	○
	• Power transmission/distribution line and substation clearance	○
	• Railway maintenance	○
	• Residential and farm clearing	○
	• Highway maintenance	○
	• Pipeline clearance	○
	• Ski resorts and other speciality field maintenance	○
	• Roadside maintenance	○
Gardening & landscaping	• Fencing	
	• Ground excavation	
	• Rock breaking	
	• Pit planting	
	• Stump splitting	
	• Golf course maintenance	○
	• Root and stump grinding	
	• Hedgerow clearance and rejuvenation	○
	• Grinding of logging residues	○
Forestry	• Timber log handling	
	• Maintenance of green area, small trees and brush	○
	• Creation and upkeep of woodland corridors and firebreaks	○
	• Tree clearing	○
	• Vegetation clearing	○
	• Branch clearing	○



The complete range of Indeco products

Products	Weight/Length
HP Hydraulic hammers	from 135 to 24400 lbs
IFP fixed pulverisers	from 1650 to 10050 lbs
IRP rotating pulverisers	from 1300 to 9900 lbs
IDC Primary Demolition Crusher	from 1980 to 15850 lbs
IMP Multiprocessor	from 3300 to 10800 lbs
IMP Mutiprocessor Car Dismantler	3300 lbs
IHC fixed compactors	from 450 to 2850 lbs

Products	Weight/Length
IHC R rotating compactors	from 950 to 3350 lbs
IMG S-D-H-L-T Multi Grabs	from 630 to 6600 lbs
ISS Shears	from 1060 to 24200 lbs
IRC rail cutters	from 9240 to 9650 lbs
IMH Mulching Heads	from 850 to 4250 lbs
IBS boom systems	from 11 to 47 ft

*Lengths can be customised on the basis of the customer's needs.

USA Version EN

Quality Management System Certification UNI EN ISO 9001:2015

INDECO North America
135 Research Drive
Milford CT, 06460
PH. (203) 713-1030 - **F** (203) 713-1040
www.indeco-breakers.com

Member of

AUTHORISED DEALER

26-10-G-IMH-EN-04-02

The contents of this publication may not be reproduced in whole or in part without prior authorization from the INDECO IND S.p.A. All rights reserved.
Trademarks used in this catalog are the property of their respective holders.