

# Compactors

IHC - Fixed

IHC R - Rotating






## IHC and IHC R compactors


Indeco IHC compactors combine high compaction with fast turnaround times. They are a very efficient replacement both for traditional risky and tiring manual equipment and for self-propelled rollers, which are at great risk of rollover during slope applications.

Compaction is achieved by applying both the dynamic force of a hydraulically-driven vibration system and the static weight of the carrier boom to the thick steel baseplate of the compactor. Of course, the dynamic forces have to be powerful enough to vibrate the steel baseplate. To enable this to happen, Indeco compactors (mounted straight onto the carrier boom) are hydraulically driven with an oil-bath bearing system, which gives a balanced design of compaction force and vibration speed, so as to achieve the depth penetration needed to reduce air voids and move more material faster. Indeco's fixed or rotating IHC hydraulic compactors offer superior efficiency and versatility compared with other products on the market. Being fitted with the same mounting bracket as other Indeco hydraulic equipment makes it easy to switch from one tool to another at the jobsite. Using just the carrier's hydraulic circuit, they are ideal for compacting backfill for trenches, as well as embankments or other steep slope applications, around foundations or close to other obstacles. Perfect for working on grainy, cohesive and semi-cohesive soils, optional adapters on the vibratory plate turn them into highly efficient pile-driving tools. Indeco's rotating compaction plate, the IHC R, makes it much easier to position the excavator at the right angle to the working surface, especially for jobs in narrow pipe trenches and confined areas, where the compaction plate needs to reach into difficult corners or skirt round manholes and other obstacles.

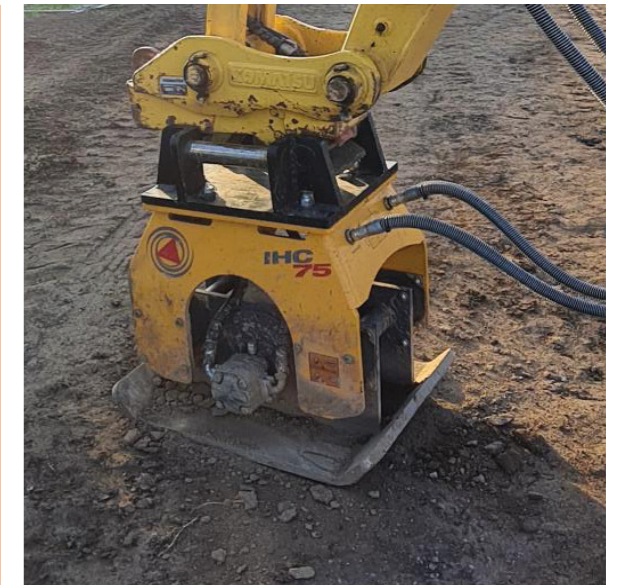




# Features of Indeco compactors

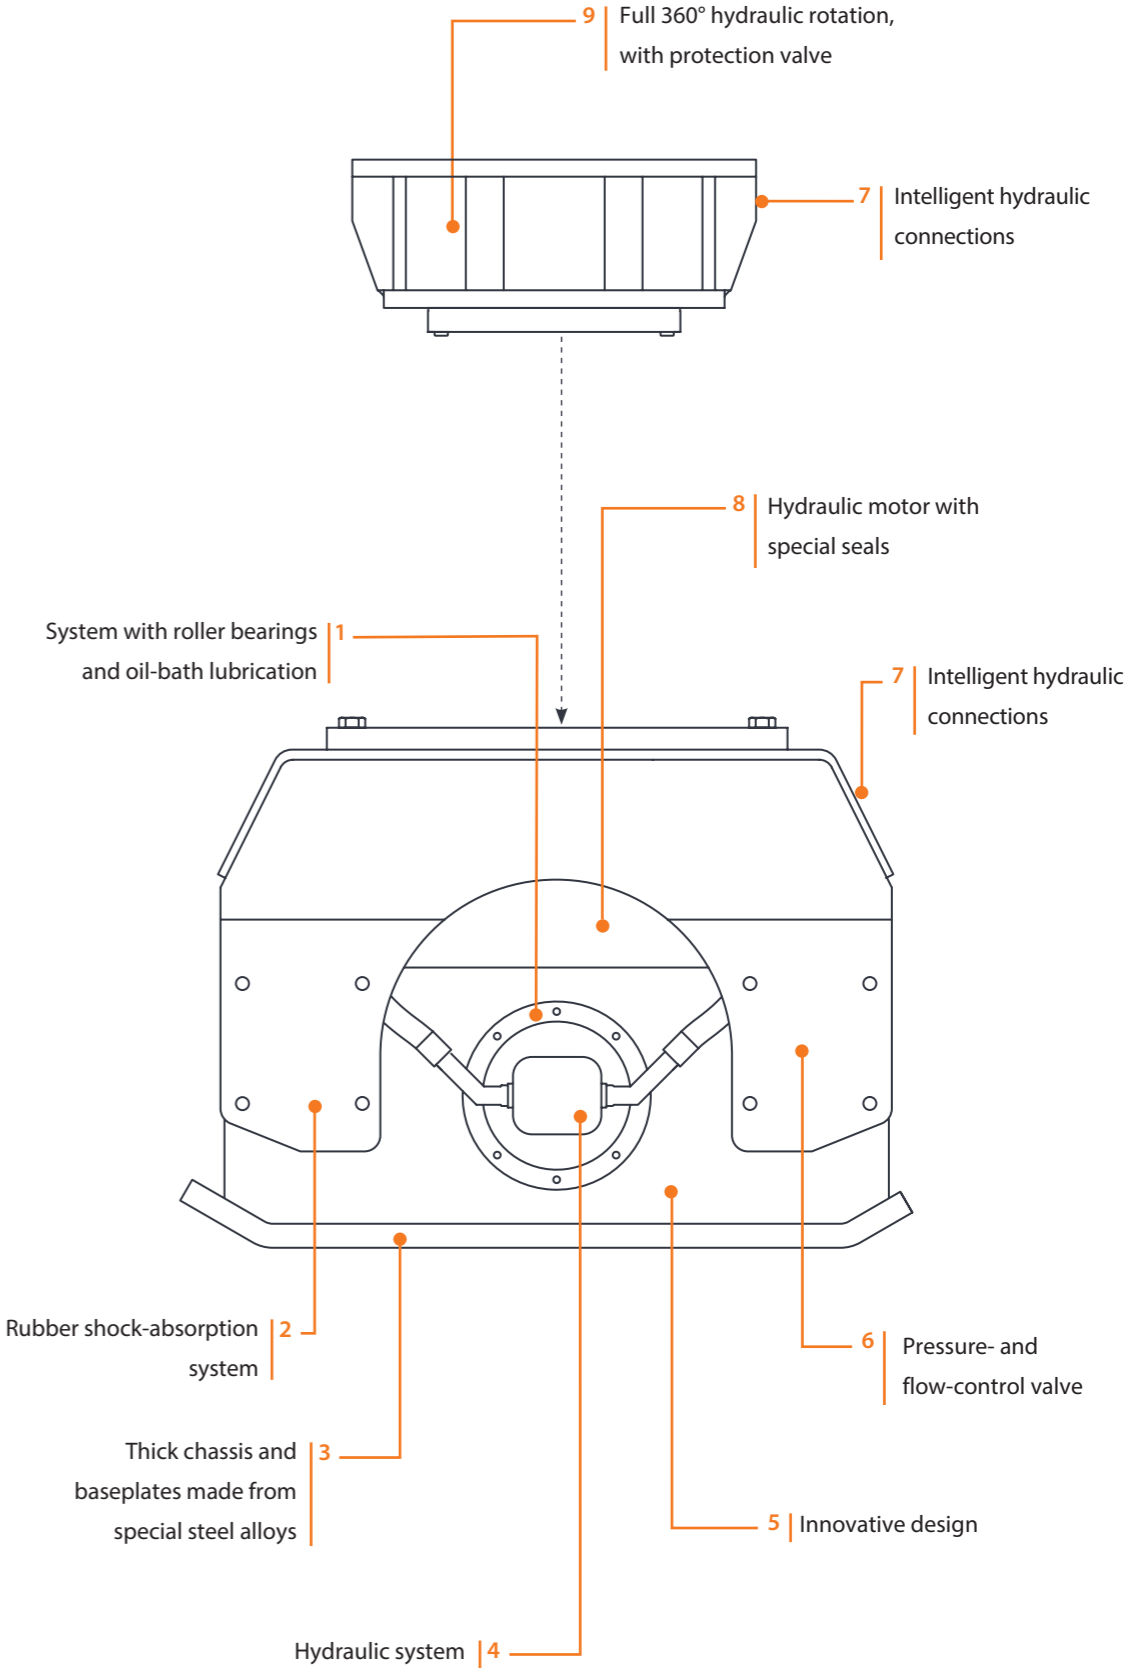Robust, versatile and highly productive, IHC compactors have a number of special features created by the technology researchers at Indeco. The system uses oil-bath bearings **[1]**, ensuring maximum reliability, low maintenance costs and high performance, even on the toughest of jobs. The rubber shock-absorber system **[2]** is designed to direct the whole force down into the material to be compacted, thus isolating vibrations from the carrier and the operator. The thick chassis and baseplates **[3]** are made from extra-strength steel alloys which means no flexing or other buckling that could affect performance. The hydraulic system **[4]** balances force and speed to ensure that the eccentric weights can achieve depth penetration and reduce air voids. The compactor has been specially designed **[5]** to work up close to trench walls, foundations, guard rails and other obstacles, along the whole width and length of the job. The pressure- and flow-control valve **[6]** provides safer quicker installation, ensuring that incorrect set-ups cannot affect the long-term reliability of the compactor. The hydraulic connections **[7]** are located in a practical and functional area in the rear of the compactor. They run parallel with the carrier hoses, which protects them from accidental breakage, especially in deep narrow pipe trenches. The motor **[8]**, with its special high-pressure seals, can withstand backpressure without the need for a drain line. Full 360° hydraulic rotation **[9]** optimizes the position of the vibratory plate under any working conditions, moving more material faster.







Technical Data	IHC 50				IHC 70				IHC 75			
Type of carrier	13				13				13			
Excavator weight	1,7 ÷ 8 tons				3,5 ÷ 13 tons				4 ÷ 14 tons			
Equipment weight*	200 Kg				445 Kg				485 Kg			
Height	56 cm				60 cm				60 cm			
Baseplate size	30,5 x 76 cm				46 x 84 cm				64 x 87 cm			
Centrifugal force	3000 Kg 29,5 KN				4000 Kg 39 KN				4000 Kg 39 KN			
Compacting force Min - Med - Max	0,8 7,8	1,2 11,8	1,7 16,7	Kg/cm <sup>2</sup> N/cm <sup>2</sup>	0,9 8,8	1,1 10,8	1,4 13,7	Kg/cm <sup>2</sup> N/cm <sup>2</sup>	0,7 6,9	0,9 8,8	1,1 10,8	Kg/cm <sup>2</sup> N/cm <sup>2</sup>
Frequency Min - Med - Max	 2000 2500 3000 rpm 33 42 50 hz				 1600 1850 2100 rpm 27 31 35 hz				 1600 1850 2100 rpm 27 31 35 hz			
Oil flow to motor	45 ÷ 70 l/min				55 ÷ 75 l/min				55 ÷ 75 l/min			
Maximum working pressure adjusted to the excavator	240 bars				200 bars				200 bars			
Maximum backpressure	7 bars				21 bars				21 bars			
Compatibility of attachment plate with mounting bracket	HP 400				HP 900				HP 900			

\*The operating weight of the equipment includes mounting bracket compatible with Indeco construction standards. Any differences in weight may be due to a different mounting bracket configuration.

Carrier key




Technical Data	IHC 150			IHC 250				
Type of carrier	<div>4</div> <div>5</div>			<div>4</div> <div>5</div>				
Excavator weight	8 ÷ 22 tons			15 ÷ 45 tons				
Equipment weight*	970 Kg			1280 Kg				
Height	79 cm			80 cm				
Baseplate size	71 x 120 cm			90 x 122 cm				
Baseplate size	10000 Kg 98 KN			17000 Kg 167 KN				
Compacting force Min - Med - Max	1,4 13,7	1,6 15,7	1,8 17,7	Kg/cm <sup>2</sup> N/cm <sup>2</sup>	1,3 12,8	1,7 16,7	2,2 21,6	Kg/cm <sup>2</sup> N/cm <sup>2</sup>
Frequency Min - Med - Max	 1800 1950 2100 rpm 30 33 35 hz			 1800 2100 2400 rpm 30 35 40 hz				
Oil flow to motor	100 ÷ 120 l/min			190 ÷ 265 l/min				
Maximum working pressure adjusted to the excavator	200 bars			170 bars				
Maximum backpressure	21 bars			7 bars				
Compatibility of attachment plate with mounting bracket	HP 1500 - HP 1800			HP 2000 - HP 2500 HP 3000 ÷ HP 4000				




N.B. All illustrations and numerical data in this catalog are purely indicative and subject to change at our discretion and without notice. We therefore reserve the right to modify them with a view to improving and continuously developing our product.

Compatibility

Suggested uses on machines with an overall weight (in tons):







Technical Data	IHC R 50	IHC R 70	IHC R 75
Type of carrier	13	134	134
Excavator weight	3,5 ÷ 13 tons	6,5 ÷ 16 tons	7 ÷ 16 tons
Equipment weight*	425 Kg	630 Kg	670 Kg
Height	88 cm	93 cm	93 cm
Baseplate size	30,5 x 76 cm	46 x 84 cm	64 x 87 cm
Centrifugal force	3000 Kg 29,5 KN	4000 Kg 39 KN	4000 Kg 39 KN
Compacting force Min - Med - Max	0,8    1,2    1,7 Kg/cm² 7,8    11,8    16,7 N/cm² 	0,9    1,1    1,4 Kg/cm² 8,8    10,8    13,7 N/cm² 	0,7    0,9    1,1 Kg/cm² 6,9    8,8    10,8 N/cm² 
Frequency Min - Med - Max	2000    2500    3000 rpm 33    42    50 hz	1600    1850    2100 rpm 27    31    35 hz	1600    1850    2100 rpm 27    31    35 hz
Oil flow to motor	45 ÷ 70 l/min	55 ÷ 75 l/min	55 ÷ 75 l/min
Maximum working pressure adjusted to the excavator	240 bars	200 bars	200 bars
Maximum backpressure	7 bars	21 bars	21 bars
Oil delivery for rotation	10 l/min	10 l/min	10 l/min
Pressure regulated for rotation	90 bars	90 bars	90 bars
Compatibility of attachment plate with mounting bracket	HP 900	HP 900	HP 900

\*The operating weight of the equipment includes mounting bracket compatible with Indeco construction standards. Any differences in weight may be due to a different mounting bracket configuration.

Carrier key



Technical Data	IHC R 150	IHC R 250
Type of carrier	45	45
Excavator weight	15 ÷ 25 tons	16 ÷ 45 tons
Equipment weight*	1185 Kg	1520 Kg
Height	108 cm	110 cm
Baseplate size	71 x 120 cm	90 x 122 cm
Centrifugal force	10000 Kg 98 KN	17000 Kg 167 KN
Compacting force Min - Med - Max	1,4    1,6    1,8 Kg/cm² 13,7    15,7    17,7 N/cm² 	1,3    1,7    2,2 Kg/cm² 12,8    16,7    21,6 N/cm² 
Frequency Min - Med - Max	1800    1950    2100 rpm 30    33    35 hz	1800    2100    2400 rpm 30    35    40 hz
Oil flow to motor	100 ÷ 120 l/min	190 ÷ 265 l/min
Maximum working pressure adjusted to the excavator	200 bars	170 bars
Maximum backpressure	21 bars	7 bars
Oil delivery for rotation	10 l/min	10 l/min
Pressure regulated for rotation	90 bars	90 bars
Compatibility of attachment plate with mounting bracket	HP 2000 - HP 2500	HP 2000 - HP 2500

N.B. All illustrations and numerical data in this catalog are purely indicative and subject to change at our discretion and without notice. We therefore reserve the right to modify them with a view to improving and continuously developing our product.

## Compatibility

Suggested uses on machines with an overall weight (in tons):



# Accessories

## 1 | Indeconnect system

New remote monitoring system, based on the principles of the Internet of Things, to prevent equipment obsolescence and keep high performance.

The 'Indeconnect' system consists of a **device** equipped with 4G technology for a wireless connection to the network, to be mounted on the equipment, and a cloud-based **web platform** you can access from mobile devices (with an app) or from PC, that lets you view the data transmitted in real time by each installed device: working hours, working position in space, hydraulic oil temperature, ambient temperature, GPS position, and more.


Through Indeconnect you can:

- **Monitor productivity**, making sure each Indeco tool is working as intended
- **Check operations**, verifying in real time the various internal and external parameters of the equipment to make sure that it is used in optimal conditions and correctly
- **Increase security**, by remotely checking the position of the equipment through GPS
- **Plan maintenance**, monitoring the health of each Indeco tool in real time, also through the automatic alert and messaging system that lets you order spare parts and reduce machine downtime to a minimum
- **Optimise rental**, by supervising and monitoring the management of rented equipment.

## 2 | Backfill blade

A useful optional, mounted on the compactor, for smoothing and levelling the earth to be compacted, without needing to switch from compactor to bucket.

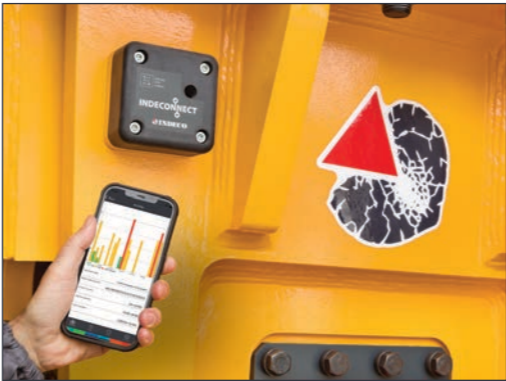


1 |



2 |



# Application areas

		IHC	IHC R
 Earth Moving and Construction	Earth moving works	<ul style="list-style-type: none"><li>• Trenching</li><li>• Ground excavation</li><li>• Floor leveling</li><li>• Soil compaction</li><li>• Trench compaction</li><li>• Loading soil or bulk material</li></ul>	<ul style="list-style-type: none"><li><input type="radio"/></li><li><input type="radio"/></li><li><input type="radio"/></li><li><input type="radio"/></li><li><input type="radio"/></li><li><input type="radio"/></li></ul>
	Foundation works	<ul style="list-style-type: none"><li>• Building foundation excavation</li><li>• Ground leveling</li></ul>	<ul style="list-style-type: none"><li><input type="radio"/></li><li><input type="radio"/></li></ul>
	Building construction	<ul style="list-style-type: none"><li>• Foundation pile driving</li><li>• Compaction around pillars</li></ul>	<ul style="list-style-type: none"><li><input type="radio"/></li><li><input type="radio"/></li></ul>
	Tunnelling	<ul style="list-style-type: none"><li>• Tunnel excavation</li><li>• Roof, face &amp; rib scaling</li></ul>	<ul style="list-style-type: none"><li><input type="radio"/></li><li><input type="radio"/></li></ul>
	Underwater application	<ul style="list-style-type: none"><li>• Dredging</li><li>• Dock deepening &amp; extension</li><li>• Canal deepening &amp; extension</li><li>• Loading soil or bulk material</li><li>• Handling rock or breakwaters</li></ul>	<ul style="list-style-type: none"><li><input type="radio"/></li><li><input type="radio"/></li><li><input type="radio"/></li><li><input type="radio"/></li><li><input type="radio"/></li></ul>
	Trenching	<ul style="list-style-type: none"><li>• Oil &amp; gas, water &amp; sewage (deep trenching)</li><li>• Trenching</li><li>• Trench soil compaction</li></ul>	<ul style="list-style-type: none"><li><input type="radio"/></li><li><input type="radio"/></li><li><input type="radio"/></li></ul>
	Road construction	<ul style="list-style-type: none"><li>• Pile driving and guard rail driving</li><li>• Asphalt repair</li><li>• Maintenance work (driveways, sidewalks and parking lots)</li><li>• Block paving</li></ul>	<ul style="list-style-type: none"><li><input type="radio"/></li><li><input type="radio"/></li><li><input type="radio"/></li><li><input type="radio"/></li></ul>
 Infrastructures	Gardening & Landscaping	<ul style="list-style-type: none"><li>• Fencing</li><li>• Ground excavation</li><li>• Rock breaking</li><li>• Pit planting</li><li>• Stump splitting</li><li>• Golf course maintenance</li><li>• Root and stump grinding</li><li>• Hedgerow clearance and rejuvenation</li><li>• Grinding of logging residues</li></ul>	<ul style="list-style-type: none"><li><input type="radio"/></li><li><input type="radio"/></li><li><input type="radio"/></li><li><input type="radio"/></li><li><input type="radio"/></li><li><input type="radio"/></li><li><input type="radio"/></li><li><input type="radio"/></li><li><input type="radio"/></li></ul>
	Forestry	<ul style="list-style-type: none"><li>• Timber log handling</li><li>• Maintenance of green area, small trees and brush</li><li>• Creation and upkeep of woodland corridors and firebreaks</li><li>• Tree clearing</li><li>• Vegetation clearing</li><li>• Branch clearing</li></ul>	<ul style="list-style-type: none"><li><input type="radio"/></li><li><input type="radio"/></li><li><input type="radio"/></li><li><input type="radio"/></li><li><input type="radio"/></li><li><input type="radio"/></li></ul>
 Agriculture and Forestry			

The full range of other Indeco products

Carucchiurazzi

Products		Weight	
IFP	8 X	750	Kg
IFP	13 X	1300	Kg
IFP	19 X	1800	Kg
IFP	28 X	2800	Kg
IFP	35 X	3450	Kg
IFP	45 X	4550	Kg
IRP	5 X	570	Kg
IRP	11 X	1150	Kg
IRP	18 X	1700	Kg
IRP	23 X	2300	Kg
IRP	29 X	2950	Kg
IRP	36 X	3600	Kg
IRP	45 X	4500	Kg
IMP*	15	1500	Kg
IMP*	20	2080	Kg
IMP*	25	2400	Kg
IMP*	35	3500	Kg
IMP*	45	4500	Kg

Products		Weight	
IHC	50	200	Kg
IHC	70	445	Kg
IHC	75	485	Kg
IHC	150	970	Kg
IHC	250	1280	Kg
IHC R	50	425	Kg
IHC R	70	630	Kg
IHC R	75	670	Kg
IHC R	150	1185	Kg
IHC R	250	1520	Kg
IMG S**	300	285	Kg
IMG S**	400	380	Kg
IMG S**	600	570	Kg
IMG S**	1200	1140	Kg
IMG S**	1700	1610	Kg
IMG S**	2300	2180	Kg
IMG S**	2800	2650	Kg
ISS***	5/7	570	Kg

Products		Weight	
ISS***	8/13	1250	Kg
ISS***	10/20	2400	Kg
ISS***	20/30	3650	Kg
ISS***	25/40	4800	Kg
ISS***	30/50	6100	Kg
ISS***	35/60	7600	Kg
ISS***	45/90	10400	Kg
IRC***	20	2800	Kg
IRC***	30	4200	Kg
IMH	3	385	Kg
IMH	5	535	Kg
IMH	6	545	Kg
IMH	8	580	Kg
IMH	10	735	Kg
IMH	14	1050	Kg
IMH	20	1500	Kg
IMH	3.2 SS	1000	Kg
IMH	4.2 SS	1400	Kg

\*Crusher configuration - \*\*Sorter configuration - \*\*\*Third-member configuration



**INDECO ind S.p.a.**  
viale Lindemann, 10 z.i. - 70132 Bari - Italy  
**PH** +39 080 531 33 70 - **F** +39 080 537 79 76  
**@** info@indecos.it - www.indecos.it/en



AUTHORISED DEALER

23-11-G-C-EN-03-01