



Shears



ISS Series



A TOOL FOR EVERY JOB



Application areas

		F	II	III
<div></div> <div>Demolition & renovation</div>	Light Demolition	<ul style="list-style-type: none">• Demolition of masonry structures• Brickwork• Natural stone• Renovation of interiors• Autoclaved aerated concrete		
	Demolition of non-reinforced concrete structures	<ul style="list-style-type: none">• Primary demolition of lightweight and standard concrete• Primary demolition of heavyweight concrete• Wall Elements• Secondary demolition		
	Composite steel & concrete structure demolition	<ul style="list-style-type: none">• Primary Demolition of Lightweight and Standard reinforced concrete• Primary demolition of heavyweight steel - reinforced concrete• Secondary Demolition floors, slabs and beams• Separating rebars from pillars and struts• Fiber-reinforced concrete• Cutting rebars and steel reinforcements		
	Demolition of metallic buildings and structures	<ul style="list-style-type: none">• Demolition of refineries• Cutting of Metal and steel structures• Cutting steel girders/beams• Cutting reinforcements	<div>○</div>	<div>○</div>
	Sorting and Loading	<ul style="list-style-type: none">• Sorting• Loading• Waste handling• Site clean-up		
	Pavement demolition	<ul style="list-style-type: none">• Asphalt• Concrete• Composite surfaces		
<div></div> <div>Recycling</div>	Processing	<ul style="list-style-type: none">• Scrap material processing• Cutting tyres• Processing rail cars• Processing cars, trucks and general automotive• Cutting tanks	<div>○</div>	<div>○</div>
	Handling and sorting	<ul style="list-style-type: none">• Scrap material handling• Scrap material sorting• Urban waste• Industrial waste• Wood and tyres		<div>○</div>
	Downsizing and sorting	<ul style="list-style-type: none">• Material downsizing and sorting in recycling quarries		

ISS shears

Vital tools for anyone working in the scrap metal or recycling sectors, Indeco ISS Steel Shears stand out for their cutting-edge design, for their extreme robustness and for their technical innovations which substantially increase their efficiency.

Rapid, efficient and surprisingly powerful, Indeco ISS shears are the ideal choice for demolishing any type of metal structure.

Indeco's tried and tested continuous rotation hydraulic system, found on all of our other rotating products, enables the shear to work in the best possible position, while its large jaw opening and fast cycle times and its incredible cutting power, make all demolition operations fast and effective.

Special extra-strength HARDOX® alloy steel make ISS shears outstandingly resistant and reliable. Each of the main knives and guide-blades was designed with four cutting surfaces and so can be rotated three times before replacement; promising more consistency, uptime, and production in your operation.



Features of Indeco hydraulic shears

The regeneration valve [\[1\]](#) speeds up no-load movement of the jaw, which opens and closes more quickly, thus reducing cycle times and increasing productivity.

The chassis [\[2\]](#), made from extra-strength HARDOX® alloy steel, eliminates any flexing of the shear body. The unique integrated dual guide system [\[3\]](#) can be used to adjust the alignment tolerance of the jaw and prevents it from buckling during the cutting stroke.

The interchangeable "quick change" wear bushings [\[4\]](#) ensure that the knives are always optimally aligned.

The heavy-duty pivot group [\[5\]](#) provides long-term cutting efficiency, keeps jaws aligned and prevents buckling.

The innovative design [\[6\]](#) improves cutting efficiency compared to similar products.

The large jaw opening [\[7\]](#) provides greater flexibility for numerous applications.

The special insert bushings [\[8\]](#) are made from an anti-friction material with a dust seal.

The large, powerful hydraulic cylinder [\[9\]](#) is an exclusive Indeco design, and provides enough force to deal with any type of working conditions. Its long-lasting seals are able to withstand up to 700 bars of pressure.

The baseplate for the ISS in fixed configuration [\[10\]](#) makes the attachment much lighter and less bulky, which means that a larger shear can be used on the excavator.

The shears have full high-speed 360° hydraulic rotation [\[11\]](#) for better positioning and optimal cutting in any working position.

The mounting bracket for the 2nd-member configuration [\[12\]](#) is used to mount the ISS straight onto the excavator boom. In this configuration, ideal for recycling ferrous material, a large attachment can be mounted even on a relatively light carrier.

The universal baseplate for 2nd member mounting brackets [\[13\]](#) is compatible with all carriers.


The 3rd member mounting bracket [\[14\]](#) is used to

mount the ISS on the carrier stick (bucket-mounted), ideal for demolition jobs.


The attachment plate [\[15\]](#) is compatible with the plate for Indeco breakers of similar weight.

In the latest design [\[16\]](#), the shear is more compact with a thicker casing, thus improving its manoeuvrability and balance, as well as increasing its overall robustness.

2nd and 3rd member configuration

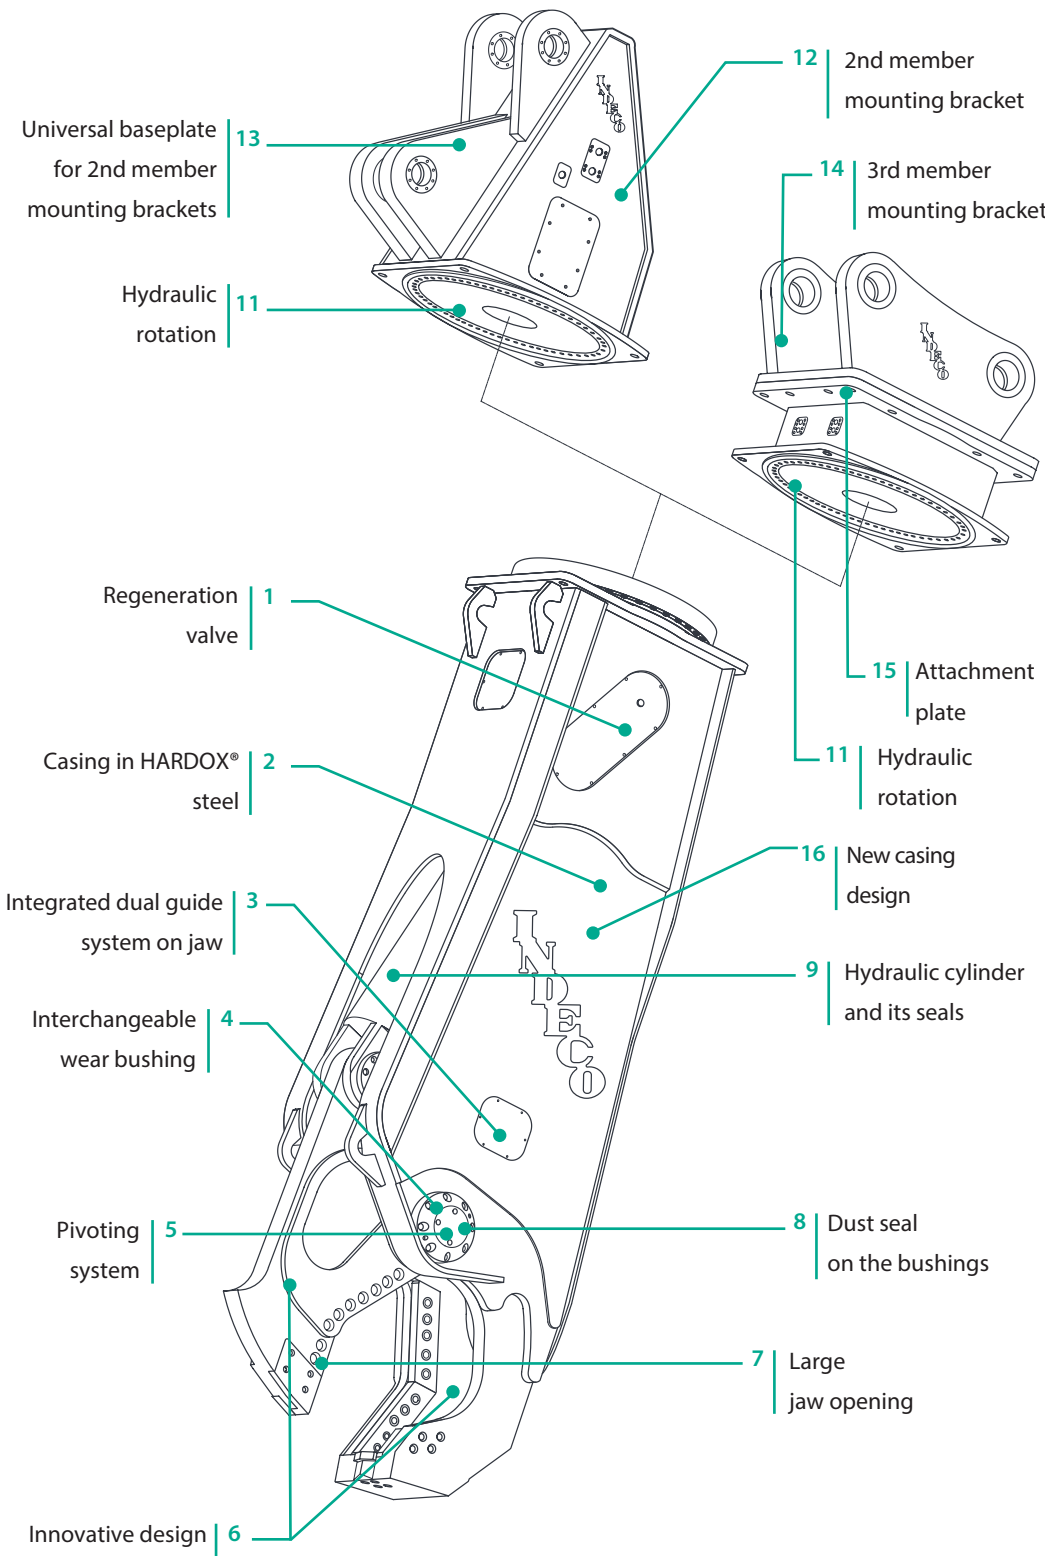


Fixed configuration

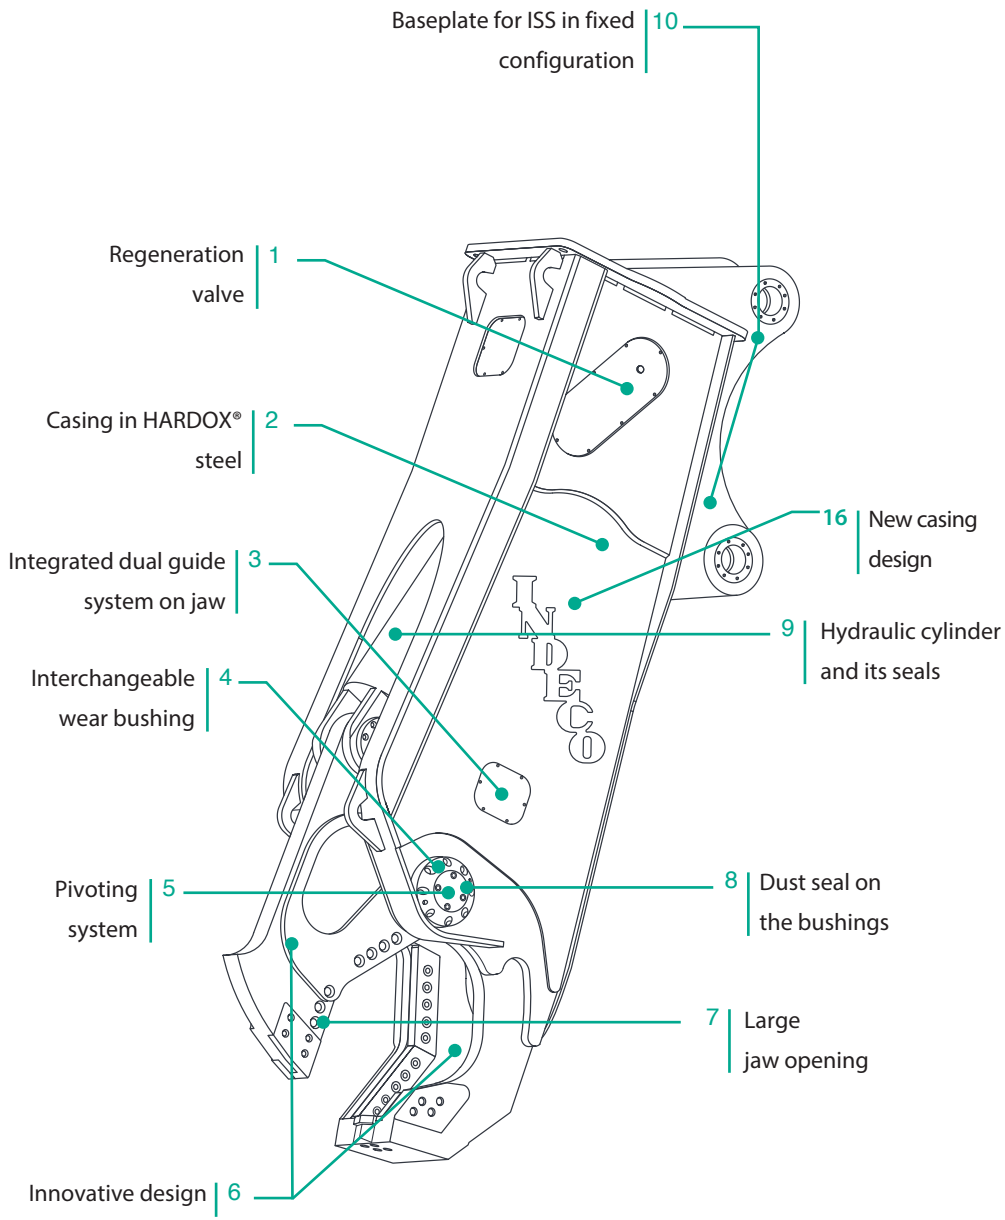



Cutting capacity

The Indeco ISS shears have exceptional capacity and cutting force, due to the following specific design features:

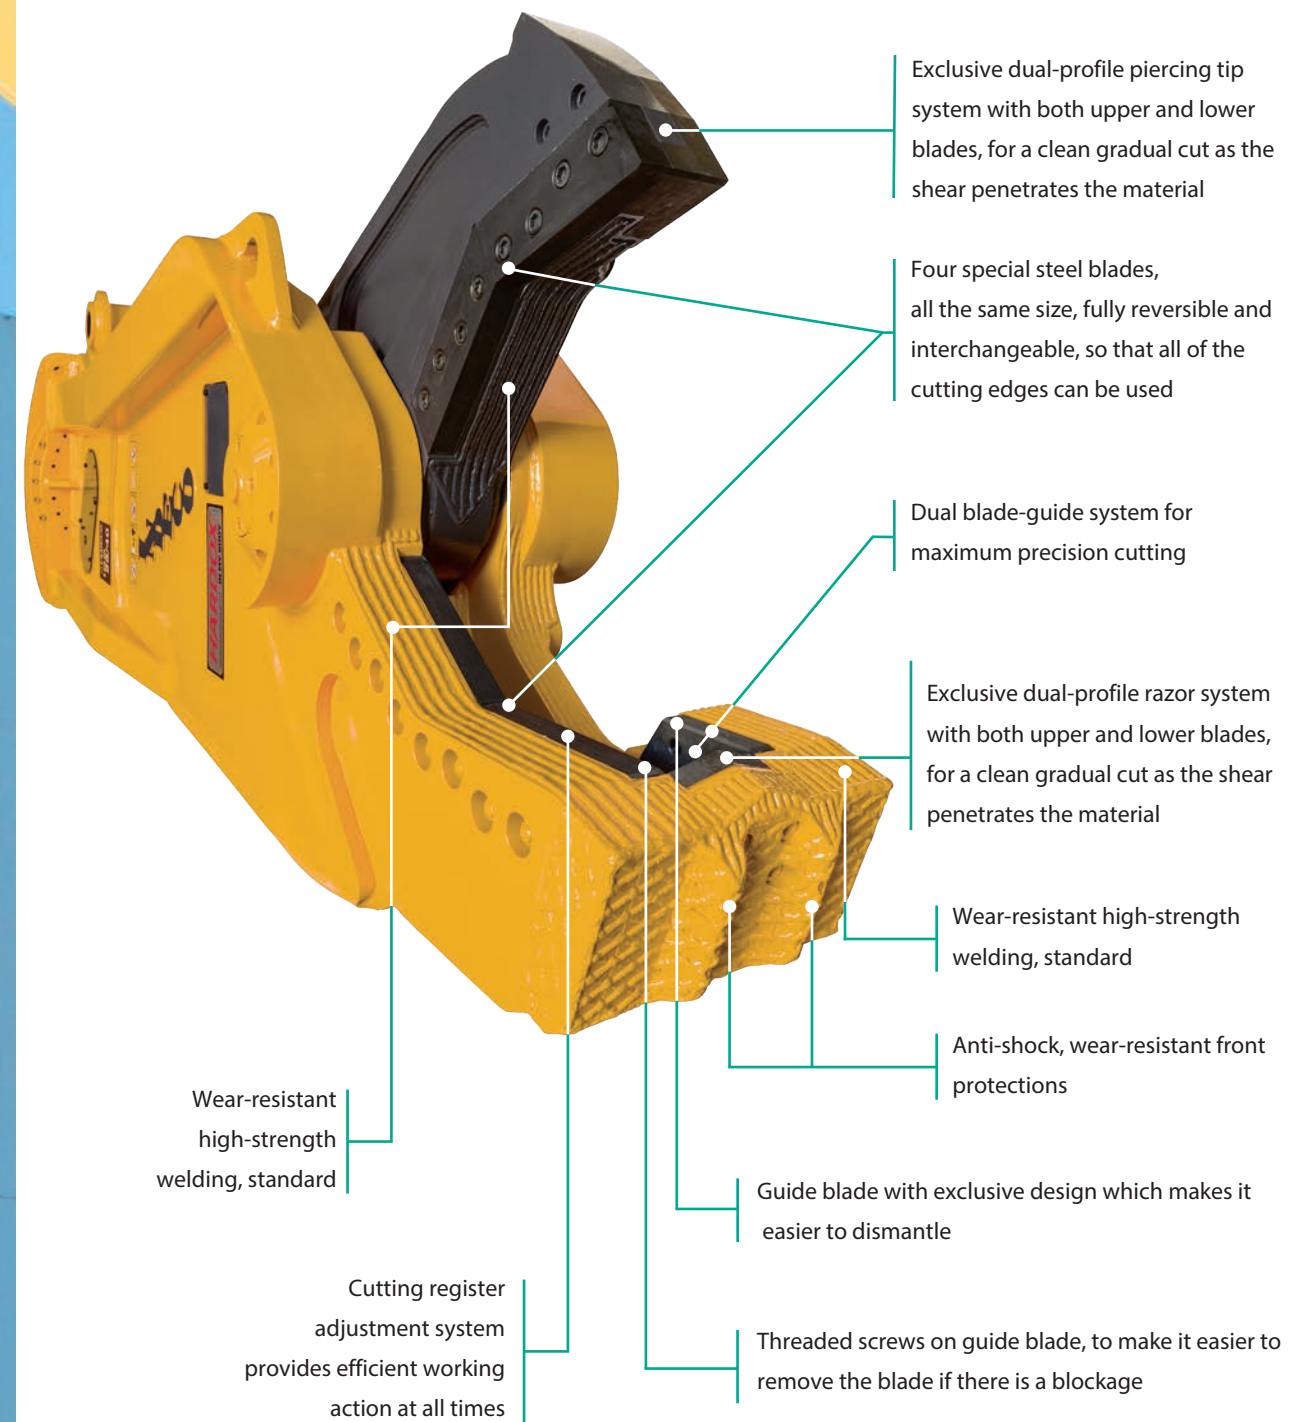

Technical Data	ISS 5/7			ISS 10/20		ISS 20/30	ISS 25/40
Type of carrier	1	2	3	4	5	5	5
Min. excavator weight in fixed version (boom-mounted) configuration	4 tons			8 tons		18 tons	23 tons
Min. excavator weight in 2nd member (boom-mounted) configuration	5 tons			10 tons		20 tons	25 tons
Min. excavator weight in 3rd member (bucket-mounted) configuration	7 tons			20 tons		30 tons	40 tons
Attachment operating weight fixed version	480 Kg			2000 Kg		3250 Kg	4500 Kg
Attachment operating weight 2nd member	570 Kg			2400 Kg		3600 Kg	5000 Kg
Attachment operating weight 3rd member	570 Kg			2400 Kg		3650 Kg	4800 Kg
Maximum working pressure	300 bars / 220 bars*			350 bars		350 bars	350 bars
Oil delivery	50 ÷ 120 l/min			100 ÷ 200 l/min		200 ÷ 300 l/min	220 ÷ 360 l/min
Maximum rotation oil flow	10 l/min			20 l/min		30 l/min	40 l/min
Maximum rotation pressure	110 bars			110 bars		110 bars	110 bars
Maximum clamping force at tip	45 tons			120 tons		140 tons	195 tons
Clamping force class	150 tons			600 tons		800 tons	1100 tons
Length	1700 mm			2724 mm		3400 mm	3500 mm
Jaw width	340 mm			450 mm		560 mm	670 mm
Jaw opening	350 mm			550 mm		660 mm	760 mm
Max jaw depth	320 mm			570 mm		680 mm	770 mm
Closure time	2 ÷ 3 s			2,4 ÷ 4,6 s		2,8 ÷ 4 s	3,2 ÷ 5 s
Opening time	1 ÷ 1,6 s			2,2 ÷ 4,2 s		2,6 ÷ 3,8 s	2,8 ÷ 4,8 s
Compatibility of attachment plate with breaker	HP 900			HP 3000 ÷ HP 4000		HP 7000 - HP 9000	HP 7000 - HP 9000

N.B. Weights may vary according to the various configurations. The information in this catalog is subject to change without notice and without any obligation or responsibility on our part. The content of this catalog is provided as a courtesy to readers and constitutes non binding information only.

*low pressure version

Carrier key



1

Compact excavator



2

Miniloader



3

Backhoe loader



4

Wheeled excavator



5

Tracked excavator



Common configurations on the following models: ISS 5/7 - ISS 10/20 - ISS 20/30 - ISS 25/40 - ISS 30/50 - ISS 35/60 - ISS 45/90

Technical Data	ISS 30/50	ISS 35/60	ISS 45/90
Type of carrier	5	5	5
Min. excavator weight in fixed version (boom-mounted) configuration	27 tons	33 tons	42 tons
Min. excavator weight in 2nd member (boom-mounted) configuration	30 tons	35 tons	45 tons
Min. excavator weight in 3rd member (bucket-mounted) configuration	50 tons	60 tons	90 tons
Attachment operating weight fixed version	5600 Kg	6800 Kg	9700 Kg
Attachment operating weight 2nd member	6300 Kg	7500 Kg	11000 Kg
Attachment operating weight 3rd member	6100 Kg	7600 Kg	10400 Kg
Maximum working pressure	350 bars	350 bars	350 bars
Oil delivery	240 ÷ 400 l/min	300 ÷ 550 l/min	360 ÷ 700 l/min
Maximum rotation oil flow	50 l/min	50 l/min	60 l/min
Maximum rotation pressure	130 bars	130 bars	130 bars
Maximum clamping force at tip	210 tons	240 tons	275 tons
Clamping force class	1300 tons	1500 tons	2500 tons
Length	4040 mm	4100 mm	4840 mm
Jaw width	680 mm	760 mm	815 mm
Jaw opening	850 mm	950 mm	1100 mm
Max jaw depth	860 mm	970 mm	1120 mm
Closure time	3,6 ÷ 5,8 s	3,6 ÷ 6,4 s	3,8 ÷ 7,2 s
Opening time	3,4 ÷ 5,6 s	3,2 ÷ 5,6 s	3,6 ÷ 7 s
Compatibility of attachment plate with breaker	HP 7000 - HP 9000	HP 12000 - HP 18000	HP 12000 - HP 18000

N.B. Weights may vary according to the various configurations. The information in this catalog is subject to change without notice and without any obligation or responsibility on our part. The content of this catalog is provided as a courtesy to readers and constitutes non binding information only.

Carrier key


1
Compact excavator


2
Miniloader


3
Backhoe loader


4
Wheeled excavator


5
Tracked excavator



ISS Fixed



ISS 2nd member



ISS 3rd member

Common configurations on the following models: ISS 5/7 - ISS 10/20 - ISS 20/30 - ISS 25/40 - ISS 30/50 - ISS 35/60 - ISS 45/90

Accessories

1 | Connecting hoses

We recommend using original Indeco high- and low-pressure hoses to connect various tools to the hydraulic system on the carrier.

2 | Special 2nd member universal mounting bracket

Indeco have designed our second-member mounting system to be flexible, extremely strong and long-lasting, and it can be used on a variety of different carriers. Digital machined-true surfaces ensure perfect alignment of the rotating components, and all service items are easily accessed via the four access panels.

3 | Mounting bracket for 3rd member configuration

Indeco have designed our 3rd member mounting brackets to give the operator the best flexibility in terms of range of reach and positioning. And they're designed identical to OEM bucket dimensions with pre-installed pins; allowing for quick change as needed and the use of quick-coupler systems if desired.

4 | Blades

Made with special heat-treated steels, using an exclusive Indeco technology which optimizes their performance and durability.



Appetite guide

Indeco shears are designed to cut and reduce the size of the most common materials used in demolitions in the mechanical, naval and construction sectors. The figures set out below refer to cutting capacity under normal working conditions. Results may vary

according to such factors as how robust the material to be cut is, what condition the shear blades are in, the characteristics of the carrier and the operator's ability. Appropriate maintenance of the shear is crucial for maximum productivity of cutting operations.

	ISS 5/7	ISS 10/20	ISS 20/30	ISS 25/40	ISS 30/50	ISS 35/60	ISS 45/90
●	20 mm	50 mm	70 mm	90 mm	105 mm	116 mm	145 mm
○	60x3 mm*	265x9 mm*	320x9,5 mm*	440x9,5 mm*	500x9,5 mm*	570x9,5 mm*	713x9,5 mm*
■	20 mm	55 mm	65 mm	85 mm	96 mm	110 mm	137 mm
▬	6 mm**	13 mm**	16 mm**	20 mm**	22 mm**	25 mm**	31 mm**
I	120 IPE***	330 IPE***	400 IPE***	450 IPE***	500 IPE***	550 IPE***	600 IPE***
I	100 HEA	260 HEA	300 HEA	340 HEA	360 HEA	400 HEA	450 HEA
I	150 I BEAM (W)	330 I BEAM (W)	410 I BEAM (W)	460 I BEAM (W)	560 I BEAM (W)	660 I BEAM (W)	790 I BEAM (W)
I JIS G3192	100x100x17	250x250x72	300x300x93	400x300x105	450x300x121	500x300x125	600x300x133

*Refers to mild steel tubing and not to other materials such as stainless steel, cast steel etc.

**The shear tip will take longer to cut into thicker sheet metal

***These figures may vary for beams of different shapes, thicknesses and material

N.B. All illustrations and numerical data in this catalog are purely indicative and subject to change at our discretion and without notice. We therefore reserve the right to modify them with a view to improving and continuously developing our product.

The full range of other Indeco products

CanucchieChirazzi

Products		Weight	
IFP	8 X	750	
IFP	13 X	1300	Kg
IFP	19 X	1800	Kg
IFP	28 X	2800	Kg
IFP	35 X	3450	Kg
IFP	45 X	4550	Kg
IRP	5 X	570	Kg
IRP	11 X	1150	Kg
IRP	18 X	1700	Kg
IRP	23 X	2300	Kg
IRP	29 X	2950	Kg
IRP	36 X	3600	Kg
IRP	45 X	4500	Kg
IMP*	15	1500	Kg
IMP*	20	2080	Kg
IMP*	25	2400	Kg
IMP*	35	3500	Kg
IMP*	45	4500	Kg

Products		Weight	
IHC	50	200	Kg
IHC	70	445	Kg
IHC	75	485	Kg
IHC	150	970	Kg
IHC	250	1280	Kg
IHC R	50	425	Kg
IHC R	70	630	Kg
IHC R	75	670	Kg
IHC R	150	1185	Kg
IHC R	250	1520	Kg
IMG S**	400	380	Kg
IMG S**	600	570	Kg
IMG S**	1200	1140	Kg
IMG S**	1700	1610	Kg
IMG S**	2300	2180	Kg
IMG S**	2800	2650	Kg
ISS***	5/7	570	Kg
ISS***	10/20	2400	Kg

Products		Weight	
ISS***	20/30	3650	Kg
ISS***	25/40	4800	Kg
ISS***	30/50	6100	Kg
ISS***	35/60	7600	Kg
ISS***	45/90	10400	Kg
IMH	5	540	Kg
IMH	6	555	Kg
IMH	8	600	Kg
IMH	10	736	Kg
IMH	12	1050	Kg
IMH	15	1500	Kg
IMH	19	1550	Kg
IMH	28	2095	Kg
IMH	3.5 SS	1150	Kg
IMH	SG16	845	Kg
IMH	SG20	845	Kg

*Crusher configuration - **Sorter configuration - ***Third-member configuration

Indeco Ind. SpA
viale Lindemann, 10 z.i. - 70132 Bari - Italy
tel. +39 080 531 33 70 - fax +39 080 537 79 76
info@indec.it - www.indec.it/en



21-04-G-GB-02-01